


U01-1-200
 UNIVERSAL BRAIDED
 CLUTCH CABLE KIT

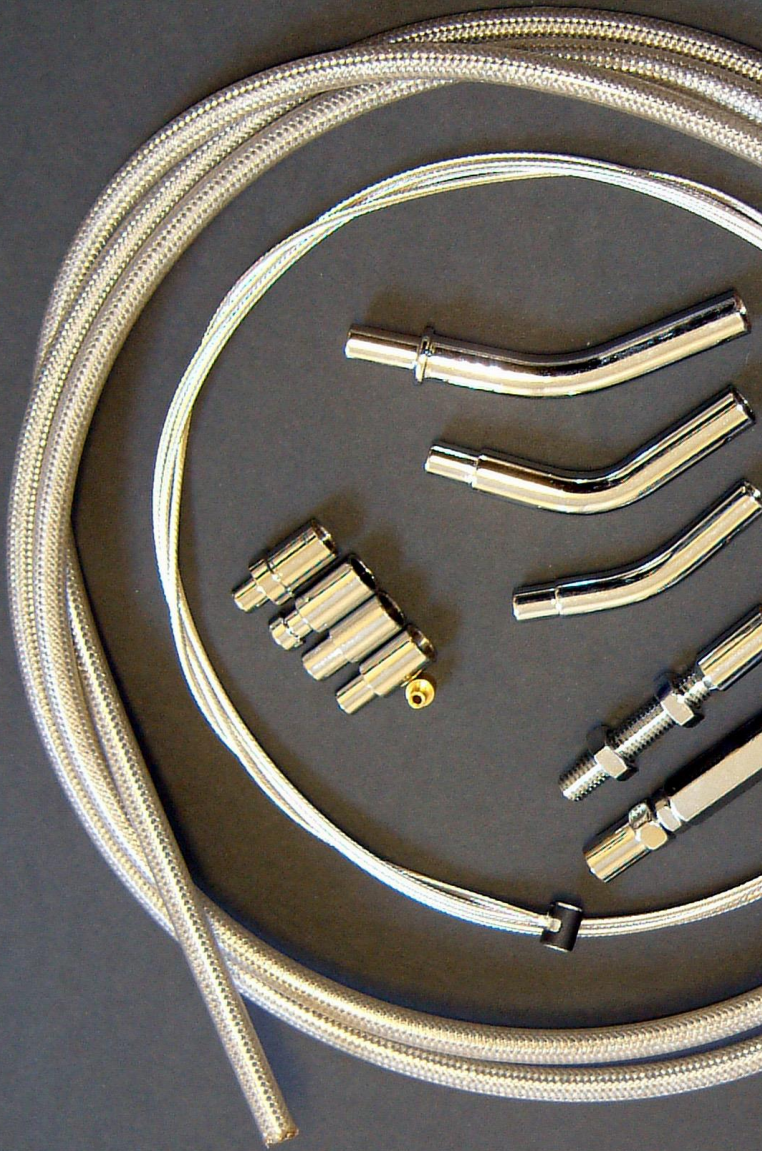

Part No.	Description	Qty
LB3NS/B	8mm O.D. BRAIDED CONDUIT	2m
P19/2	Inner cable 1x19 strand wire 2.0mm ϕ (6mm ϕ x10mm nipple cast to 1 end)	2m
R77/2	Inner cable 7x7 wire rope 2.0mm ϕ (6mm ϕ x10mm nipple cast to 1 end)	2m
BN49	Barrel nipple ϕ 5/16" x 5/16"	1
BN610	Barrel nipple 6mm x 10mm ϕ	2
F8C	Stepped Ferrule 10mm ϕ , Nose 8mm ϕ	1
F7C	Stepped Ferrule 10mm ϕ , Nose 6.9mm ϕ	1
F9GC	Stepped Ferrule 9.2mm nose ϕ	1
TN24	Trumpet nipple ϕ 3.5mm- ϕ 5.8mm x 9.5mm	1
RB7M7C	Ferrule Bush 7mm nose ϕ	1
A81C	Midway Adjuster M8x1.25x20mm	1
ACS840C	Ferrule Adjuster M8x1.25x50mm	1
N8	Nylon nipple sleeve ϕ 8 mm	1
N10	Nylon nipple sleeve ϕ 3/8" (10mm)	1
FB5C	Ferrule Bend 8.9mm ϕ , 7.8mm nose	1
FB6C	Ferrule Bend 9.8mm ϕ , 7.7mm nose	1
FB7C	Ferrule Bend 9.7mm ϕ , 7.65mm nose	1

This high quality universal clutch cable kit includes **2m** of braided conduit with Teflon liner, **2m** of inner wire and selection of fittings. One end of the inner wire is fitted with a barrel nipple (BN610 6mm ϕ x 10mm). The other end will need to be cut to length and the required nipple soldered in place. The ferrules and adjusters are a snug fit on the conduit. They can be bonded in place during the assembly or use a centre punch to make a small indentation in their side. The fittings can be adapted for a range of models. Basic soldering kit is needed to solder the nipples in place.